






**AUDIENCE MEASUREMENT SYSTEM FOR DIGITAL TELEVISION****Publication number:** EP0985287 (A1)**Publication date:** 2000-03-15**Inventor(s):** LU DAOZHENG [US]; KEMPTER PAUL C [US]; FEININGER WILLIAM A [US]**Applicant(s):** NIELSEN MEDIA RES INC [US]**Classification:****- international:** *H04N17/00; H04H60/39; H04H60/45; H04N7/16; H04N7/173; H04H60/82; H04N17/00; H04H1/00; H04N7/16; H04N7/173; (IPC1-7): H04H9/00; H04N7/16***- European:** H04N7/16E3; H04H60/39; H04H60/45**Application number:** EP19980933309 19980709**Priority number(s):** WO1998US14286 19980709; US19980076517 19980512**Also published as:** EP0985287 (B1)  
 WO9959275 (A1)  
 US2002010919 (A1)  
 US2002059577 (A1)  
 US2007055987 (A1)

more &gt;&gt;

Abstract not available for EP 0985287 (A1)

Abstract of corresponding document: **WO 9959275 (A1)**

A television audience measurement system measures viewing of a television program viewed on digital television located in a statistically selected site by (i) retrieving an audience measurement data packet from a television set in order to identify the television program, (ii) detecting an audio code embedded in the television program in order to identify the television program, (iii) extracting an audio signature from the television program in order to identify the television program, (iv) identifying the television program through use of a software agent, and (v) selecting at least one of the retrieving means, the detecting means, the extracting means, and the software agent in order to identify the television program.

---

Data supplied from the esp@cenet database — Worldwide



(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention  
of the grant of the patent:  
**11.05.2005 Bulletin 2005/19**

(51) Int Cl.7: **H04H 9/00, H04N 7/16**

(86) International application number:  
**PCT/US1998/014286**

(21) Application number: **98933309.1**

(87) International publication number:  
**WO-1999/059275 (18.11.1999 Gazette 1999/46)**

(22) Date of filing: **09.07.1998**

(54) **AUDIENCE MEASUREMENT SYSTEM FOR DIGITAL TELEVISION**  
**ZUSCHAUERERMITTLUNGSSYSTEM FÜR DIGITALES FERNSEHEN**  
**SYSTEME D'AUDIMAT POUR TELEVISION NUMERIQUE**

(84) Designated Contracting States:  
**BE CH DE DK ES FI FR GB IE IT LI SE**

- **KEMPTER, Paul, C.**  
**Palm Harbor, FL 34684 (US)**
- **FEININGER, William, A.**  
**Palm Harbor, FL 34684 (US)**

(30) Priority: **12.05.1998 US 76517**

(43) Date of publication of application:  
**15.03.2000 Bulletin 2000/11**

(74) Representative:  
**von Samson-Himmelstjerna, Friedrich R. et al**  
**SAMSON & PARTNER**  
**Widenmayerstrasse 5**  
**80538 München (DE)**

(60) Divisional application:  
**00114271.0 / 1 043 853**  
**00114272.8 / 1 043 854**

(73) Proprietor: **Nielsen Media Research, Inc.**  
**New York, New York 10171-0074 (US)**

(56) References cited:  
**EP-A- 0 687 083** **US-A- 4 677 466**  
**US-A- 5 488 408** **US-A- 5 510 859**  
**US-A- 5 526 427**

(72) Inventors:  
• **LU, Daozheng**  
**Dunedin, FL 34698 (US)**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

## Description

### Technical Field of the Invention

**[0001]** The present invention relates to the measurement of audiences of digitally broadcast television programming and to the measurement of usage of other information services provided to the audiences.

### Background of the Invention

**[0002]** Of the many approaches to measuring the usage of electronic entertainment equipment (commonly called "tuning" data), one approach involves the addition of an identifying code to a radio or television program, the distribution of the identifying code with the program throughout the relevant broadcasting system, and the detection and interpretation of the identifying code when the broadcast signal is viewed or heard in a statistically selected monitoring site. An example of a system which implements this type of measurement approach may be found in the following patents: U.S. Patent No. 5,481,294 to Thomas et al., who describe, inter alia, identifying codes added to the vertical blanking interval of an NTSC television broadcast; U.S. Patent No. 5,629,739 to Dougherty, who is particularly concerned with the addition of an identifying code to a low energy portion of the audio spectrum of an NTSC signal; and U.S. Patent No. 5,404,377 to Moses, who teaches an audio encoding arrangement using signal masking to decrease the perceptibility of the identifying code.

**[0003]** Another approach to measuring usage of electronic entertainment equipment involves the extraction of a characteristic feature signature (or characteristic feature signature set) from the programming selected for viewing, and the storing of a time-stamped signature (or signature set) in a memory for subsequent transmission to a central data collection office where the signature (or signature set) is compared with corresponding reference signatures collected by the central office from known broadcasting sources. This approach is taught by Lert and Lu in U.S. Patent No. 4,677,466.

**[0004]** Yet another approach to the measurement of the usage of electronic entertainment equipment has been that of comparing the viewed signal (or some component or artifact thereof) with all the signals available to a sampled household at the time the measurement is made. A review of apparatus and methods useful for this measurement approach is found in the teachings of Thomas et al. in U.S. Patent No. 5,629,739 and of Lu et al. in U.S. Patent No. 5,594,934.

**[0005]** Wheeler, et al., in U.S. Application Serial No. 08/786,270, filed on January, 22, 1997 and corresponding to WO A-9832251 published on 23.07.1998, teach a video signal source detection arrangement which determines the source of a video and/or audio signal being displayed by a television receiver. The arrangement implements a variety of tuning measurement approaches.

For example, it can be used to read an identifying ancillary code transmitted with television programming, to obtain characteristic feature signatures from television programming, or to obtain a signal that is matched with a contemporary reference signal obtained by a television tuner controlled by measurement equipment.

**[0006]** Chan, in U.S. Application Serial No. 08/654,309, filed on May 28, 1996 corresponding to WO-A-9745973 published on 24.04.1997, teaches a sensor arrangement for non-intrusively obtaining a representation of video and synchronization signals from a television receiver.

**[0007]** Changes in the methods of measuring the reception of television or radio programming are required because of a planned change-over from analog to digital broadcasting. In the U.S., the change-over is scheduled to be phased in by the year 2006, as documented in the Federal Communication Commission's Mass Media Docket 87-268, with particular reference to the Fifth Report and Order, FCC 97-116, April 3, 1997 and to the Sixth Report and Order, FCC 97-115, April 3, 1997. Some of the changes, and their respective impacts on approaches used for measuring analog broadcasts, include the following: (1) digital broadcast techniques do not use a vertical blanking interval and, therefore, the program tracking and identifying codes that are written in the vertical blanking interval of analog broadcast signals will not be transmitted; (2) multiple signal formats and associated multiple display formats having, among other features, differing height-to-width ratios and different resolutions are allowed, so that existing video signal correlation methods used with analog broadcasts may essentially be disabled because these methods depend on having the same pictorial feature appear at corresponding places on the measured and reference displays; (3) a broadcaster can transmit as many as six programs (arrayed as a sequence of data packets, where each data packet is labeled as to which of the programs' data is carried therein) within an assigned 6 MHz frequency band by trading off pictorial resolution for an increase in the number of programs so that (i) digital signal compression methods used to decrease the spectrum space required by a program destroy program identifying codes embedded in an original, high-resolution, program master, and (ii) determining which channel has been tuned by a receiver does not uniquely identify a program being viewed if more than one program is being transmitted in that channel; and, (4) data other than television broadcasting may be co-transmitted in the same channel and, in some cases, it is expected that the other data will be related in some manner to the co-transmitted programming so that a viewer can interact with the TV programming (e.g., to obtain a program guide or detailed information on an advertised product, to automatically switch to a desired program, or to take part in an audience-participation program).

**[0008]** It may be noted that, although projected digital signal compression and transmission methods destroy

the types of video codes used in, and suggested for, the prior-generation analog broadcasting approaches, it is expected that less change will be encountered with respect to audio codes. That is, because the audio component of a television broadcast comprises much less information than does the video, there is much less to be gained by applying signal compression methods to audio. Nonetheless, it is expected that various audio compression methods may be employed. These methods include those defined by the Dolby AC-3 or the European MUSICAN standards, or those defined by some yet-to-be-defined standard operable within the relatively open and flexible MPEG arrangement. Although the coding approaches taught in the aforementioned U.S. Patent No. 5,404,377 are known to survive the Dolby AC-3 and MUSICAN compression methods, compression methods other than Dolby AC-3 and MUSICAN may destroy these codes. Moreover, although the change in technology may obviate the use of some of the codes, such as those described above, other codes (e.g., digital data packet codes telling a receiving site which of several interleaved programs is associated with a given data packet) are expected to be broadcast both with television programming and with any co-transmitted data that are related to, and intended to be used in conjunction with, one or more of the programs.

**[0009]** In addition to changes in transmission equipment and signals, considerable changes are expected in reception equipment. Notable among these are both the use of set top signal converters (generally referred to as set top boxes) allowing a digital broadcast to be viewed on an analog receiver, and a projected convergence of television receivers and computers. In the short term, for example, it is expected that digital receivers, configured as plug-in boards for personal computers, will be used to enable the display of digital television signals on the computers.

**[0010]** Another traditional measurement reflected in television audience reporting has been the determination of who actually viewed the program that was received by the equipment being monitored in a statistically selected monitoring site. A related measurement of interest is the identification of users of on-line services, such as on-line services provided over the Internet. Also, it is clear that measuring the members of an audience in a statistically selected monitoring site who are interactively using a television and/or accessing the Internet, and the information delivery apparatus used to deliver information to the members, will continue to be important.

**[0011]** By far the most commonly used approach in making these measurements is that of interrogation, wherein the viewer and/or Internet user is asked to identify himself or herself as a member of the television audience or as an Internet user. In connection with television viewing, this inquiry is usually done by means of an electronic prompting and data input device (commonly referred to as a Peoplemeter) associated with a moni-

tored receiver in a statistically selected monitoring site. The member identification may also include age, sex, and other demographic data. It is common to store both the demographic data and the tuning data associated with each monitored receiver in the statistically selected monitoring site in store-and-forward equipment located within the monitoring site and to subsequently forward these data to a central office computer via a direct call over the public switched telephone network, or via the Internet, on a daily basis.

**[0012]** Of particular interest in this area is the teaching of an audience interrogation arrangement disclosed by McKenna et al., in U.S. Patent No. 4,816,904. According to this arrangement, a prompting message is displayed on a television screen overlaid on viewer selected programming by mixing the prompting message with the video signal being sent to the display. However, McKenna et al. do not teach a "tiling" arrangement where the prompting message is displayed on a portion of a display separated from the portion of the display devoted to television picture.

**[0013]** Many arrangements have been proposed in the computer arts for reliably identifying a user so that only selected individuals can secure access to some of the data on a computer or computer system. The most common of such arrangements is that of requiring the user to enter both his or her claimed identity along with a password. Other arrangements have included the use of various biometric techniques, such as image or voice recognition devices. Additionally, it is well known in the audience measurement arts to use computer-based image recognition in order to identify members of a viewing audience. Notable among teachings in this area is that by Lu in U.S. Patent No. 4,858,000.

**[0014]** Further, US-A-5 510 859 discloses a system for non-invasively identifying the channel a TV is tuned to by measuring the local oscillator signals leaking out from the TV.

**[0015]** Finally, EP-A-0687083 discloses an audience measurement system in which audio components of received television programs are digitized and time multiplexed on a high frequency carrier for local transmission. The components are time multiplexed in a known order. The locally transmitted signal is received and demodulated by a measuring unit comprising a microphone and means for processing the signals picked up by the microphone. The demodulated local signal and the processed microphon signal are input to a comparator.

#### Summary of the Invention

**[0016]** The present invention provides a television audience measurement system according to claim 1 and a method of identifying a television program selected by a viewer according to claim 8.

### Brief Description of the Drawing

[0017] These and other features and advantages of the present invention will become more apparent from a detailed consideration of the invention when taken in conjunction with the drawings in which:

Figure 1 is a schematic block diagram depicting typical digital television broadcasting and reception equipment;

Figure 2 is a schematic block diagram depicting an audio-based tuning measurement system which is usable with either digital or analog broadcasting and which is in accordance with a first embodiment of the present invention;

Figure 3 is a schematic block diagram depicting a tuning measurement system which employs a software agent resident in some of the monitored receiving equipment and which is in accordance with a second embodiment of the present invention;

Figure 4 is a schematic block diagram depicting the use of digital source detection in accordance with a third embodiment of the present invention;

Figure 5 is a schematic block diagram depicting the use of digital source detection in accordance with a fourth embodiment of the present invention;

Figure 6 is a schematic block diagram depicting the use of data ports on various television viewing equipment in order to measure television related data in accordance with a fifth embodiment of the present invention; and,

Figure 7 is a flow chart depicting the operation of a software agent of the present invention.

### Detailed Description of the Invention

[0018] A typical digital television broadcasting environment, which is planned during a transition period in which both digital and analog programs are transmitted, may comprise some combination of the elements depicted in Figure 1. Network programming, and other non-local programming, is provided to a local television station 10 from a broadcast station over a communication medium 12, such as a satellite, or terrestrial digital transmission lines, or the like. Local programming is also provided to the local television station 10 from some mixture of high definition television (HDTV) cameras 14 (which may employ a variety of formats), standard definition digital video cameras 16 (which may employ a variety of resolutions and aspect ratios), and analog sources comprising both analog video cameras 18 (e.g., those compatible with the prior generation NTSC broadcast standard), and cinema film sources 20 that have historically been converted to the NTSC standard by means of well known telecine 22.

[0019] The signals from the analog video cameras 18 and from the cinema film sources 20 are input to an A/D converter 24 having an appropriate digital output. The

outputs from the A/D converter 24, from the communication medium 12, from the high definition television (HDTV) cameras 14, and/or from the standard definition digital video cameras 16 are provided to a switching and routing apparatus 26. The switching and routing apparatus 26 passes selected ones of the signals provided to it through digital compression equipment 28 prior to being broadcast from the station's transmitter 30. The station's transmitter 30 may also include an antenna, a satellite dish, a cable modem, or the like.

[0020] In addition, a cable headend 31 (which is shown as a single cable provider but which may represent a plurality of cable providers) receives signals over the air, from satellite distribution, or the like, and distributes the signals (with or without reformatting) by way of regular cables, optical fibers, microwaves, or the like.

[0021] The digital transmission from the local television station 10 and/or from the cable headend 31 may be directly received and displayed in a statistically selected monitoring site 32 by a digital television set 34. The digital transmission also may be directly received and converted by a digital converter 36 (commonly configured as a set top box or STB) into an analog output (e.g., in the NTSC format) for use by an analog television set 38 purchased by a viewer prior to the change-over to digital programming. The digital transmission further may be directly received and displayed by a personal computer 40 that has a digital receiver 42 providing a baseband video output signal that the personal computer 40 can show in one of the windows 44 defined on its display unit 46. The digital receiver 42, for example, could be a plug in board of the personal computer 40 or integrated on the motherboard. The personal computer also may have speakers 47, a keyboard 48, and a mouse 50 or other pointing device known in the art.

[0022] Moreover, the digital transmission may be directly received and converted by a digital converter 52 to a form useable by a digital television set 54. For example, the digital converter 52 may be used for pay-per-view television programming, video-on-demand television programming, satellite programs, and/or other services provided to the statistically selected monitoring site 32. The digital transmission also may be directly received and converted by a digital converter 56 to a form useable by a simple monitor 58. In either of these two cases, the digital television viewing can be measured by means of metering technologies similar to the set top box and an analog television configuration described below.

[0023] In addition to the direct reception of the digital transmission by apparatus dedicated solely to that purpose (e.g., the digital television set 34 and/or the personal computer 40), it is expected that a variety of yet-to-be-defined consumer electronic apparatuses will be configured that incorporate at least some of the features of both a digital or analog television receiver and a home computer.

[0024] A first embodiment 60 of the present invention,

which measures tuning to digital television programming received in a statistically selected monitoring site 62, is depicted schematically in Figure 2. The first embodiment 60 measures such tuning by detecting program identification codes and/or extracting signatures from the audio portion of the television signal to which a receiver is tuned. This audio portion is detected by a detector 64 in the case of a digital television set 66, and by a detector 68 in the case of an analog television set 70. The detector 64 may detect the audio portion of a program to which the digital television set 66 is tuned by non-intrusively detecting the sound provided by a speaker 72 of the digital television set 66 (in which case the detector 64 may be a microphone) or by intrusively detecting the audio signal from a direct connection to the speaker, the audio output terminals, or the audio processing circuitry of the digital television set 66. Similarly, the detector 68 may detect the audio portion of a program to which the analog television set 70 is tuned by non-intrusively detecting the sound provided by a speaker 74 of the digital television set 66 or by intrusively detecting the audio signal from a direct connection to the speaker, the audio output terminals, or the audio processing circuitry of the analog television set 70. The analog television receiver 70 is provided with a digital converter 76, which may be similar to the digital converter 36 of Figure 1.

[0025] The audio portion of a television program may also be detected by a detector 78 when the television program is played by a personal computer 80 on a monitor 82 and speakers 84. The detector 78 may detect the audio portion of a program to which the personal computer 80 is tuned by non-intrusively detecting the sound provided by the speakers 84 or by intrusively detecting the audio signal from a direct connection to the speaker, the audio output terminals, or the audio processing circuitry of the personal computer 80.

[0026] As has been taught by Thomas et al., in U.S. Patent No. 5,629,739, a representation of the audio portion picked up by the detector 64 can be analyzed by a site unit (SU) 86 and/or a home unit (HU) 88 (which may be provided with data storage and forwarding unit capability) within the statistically selected monitoring site 62 in order to determine if the audio portion from the digital television set 66 contains television program identification codes. Alternatively, the representation of the audio portion picked up by the detector 64 can be analyzed at a remotely located data collection central office 90 in order to determine if the audio portion from the digital television set 66 contains such television program identification codes. The remotely located data collection central office 90 is schematically depicted as a computer based data collection central office that interchanges data with the home unit 88 over a communication network 92, such as a public switched telephone network, the Internet, or the like.

[0027] Similarly, a representation of the audio portion picked up by the detector 68 can be analyzed by a site

unit 94 and/or the home unit 88 in order to determine if the audio portion from the analog television set 70 contains television program-identifying codes, and a representation of the audio portion picked up by the detector 78 can be analyzed by a site unit 96 and/or the home unit 88 in order to determine if the audio portion from the personal computer 80 contains television program-identifying codes. Alternatively, the representation of the audio portions picked up by the detectors 68 and 78 can be analyzed at the remotely located data collection central office 90 in order to determine if the audio portions from the analog television set 70 and the personal computer 80 contain television program identification codes.

[0028] Moreover, a person identifier 98 may be provided in order to identify the persons watching television programming on the digital television set 66. The person identifier 98 may be video camera, an IR camera, or the like. When such equipment is available in the statistically selected monitoring site 62, the site unit 86 may employ known head location and face recognition software (e.g., as taught by Lu in U.S. Patent No. 4,858,000) for the identification of the viewing persons and for the collection of other demographic data. Similarly, person identifiers may be provided in order to identify the persons watching television programming on the analog television set 70 and on the personal computer 80.

[0029] Instead of analyzing the representations of the audio portions picked up by the detectors 64, 68, and 78 in order to determine if the audio portions from the corresponding digital television set 66, analog television set 70, and personal computer 80 contain television program-identifying codes, characteristic signatures can be extracted from these representations for subsequent comparison, either in the statistically selected monitoring site 62 or in the central office 90, with previously collected reference signatures in order to identify the television programs to which the digital television set 66, the analog television set 70, and the personal computer 80 are tuned.

[0030] Programs played by VCRs on the digital television set 66, on the analog television set 70, and on the personal computer 80 can be identified using either the code or the signature technique. Thus, if the programs being played carry program identification codes that are preserved through the process of recording and replay in the case of time shifted viewing, or that are recorded in the programs stored on tapes to be rented or sold, the program identification codes can be detected at the time that the programs are played so that the audiences of the programs may be measured. However, if the programs being played are non-encoded programs, or if the program identification codes are lost (e.g., during the recording process), then the embodiments of the present invention described herein can determine the programs being viewed, when the tapes are played, by extracting characteristic signatures from these programs and by matching the extracted signatures to reference signatures stored in a reference signature data-

base. In this case, searching can be optimized by the use of well known hashing techniques.

[0031] Although the present invention may use either the code technique or the signature technique in order to measure audiences of programs played on digital television equipment, the present invention may use both of these two techniques so that one of the techniques backs up the other in the event that the one technique is unable to identify a viewer selected television program. For example, signatures are extracted and matched in order to identify a viewer selected television program only if identifying codes cannot be detected. As a further alternative, the present invention may use both of these two techniques simultaneously. Demographic data may also be collected in connection with the present invention.

[0032] It may be noted that, although the first embodiment 60 measures the great majority of the overall audience, it is not arranged to measure interactive features (e.g., co-transmitted advertising detail) that are expected to be part of the digital broadcasting environment. Therefore, an important feature of the following embodiment is that it measures interactive features.

[0033] Accordingly, a second embodiment 100 of the present invention is provided as shown in Figure 3. The second embodiment 100 measures tuning to digital television programming in connection with a statistically selected monitoring site 102. As will be apparent from the discussion below, this second embodiment 100 may include some or all of the features of the first embodiment 60, as well as the new features described below in connection with the second embodiment 100.

[0034] According to this second embodiment 100, tuning data, and possibly demographic data, are collected from digital television reception equipment that includes processing equipment preferably having adequate non-volatile or battery-backed memory available so that an algorithm, hereinafter referred to as a software agent, can be stored thereon. The digital television reception equipment of the second embodiment 100 may include (i) a personal computer 104 which may be similar to the personal computer 40 of Figure 1, (ii) a digital converter 106 which may be similar to the digital converter 36 of Figure 1, (iii) an analog television set 108 operating in response to the digital converter 106, and (v) a digital television set 110.

[0035] One or more software agents of the second embodiment 100, as disclosed in greater detail hereinafter, monitor operating tasks in order to create time-stamped records containing tuning and/or other data regarding operation of the particular pieces of equipment in which the software agents are resident. Such monitored operating tasks may be, for example, messages passed from a remote or other control operated by a user to a tuner or other program selector in order to select a television program being broadcast in a channel, messages passed from a controller of processing equipment to a tuner in order to select a television program being

broadcast in a channel, or the like. Although software agents are expected to be able to effectively eavesdrop on data traffic passing through their hosts' data ports, the use of software agents would not fully measure tuning at viewing sites unless each item of television equipment at those sites has a respective software agent within it so that a complete set of operating tasks can be captured.

[0036] Accordingly, a software agent 112 is included in the digital converter 106. The software agent 112 monitors operating tasks in order to create time-stamped records containing tuning and/or other data regarding operation of the digital converter 106 in which the software agent 112 is resident. Thus, the software agent 112 detects, for example, a message relating to selection of a television program being broadcast in a selected channel. From this detected message, the identity of the selected television program may be determined. The software agent 112 is also arranged to eavesdrop on data traffic passing through its host's input/output data port 114, and to communicate over the input/output data port 114. Accordingly, programs to which the analog television set 108 is tuned may be detected through use of the software agent 112. The software agent 112 may be downloaded over a communication medium 116 to the digital converter 106 by use of the input/output data port 114. Alternatively, the software agent 112 may be a plug in, may be resident on a floppy disk, or the like.

[0037] Similarly, a software agent 118 is included in the digital television set 110. The software agent 118 monitors operating tasks associated with the digital television set 110 in order to create time-stamped records containing tuning and/or other data regarding operation of the digital television set 110 in which the software agent 118 is resident. The software agent 118 is also arranged to cooperate with its host's input/output data port 120. A software agent 122 is included in the personal computer 104. The software agent 122 monitors operating tasks associated with the personal computer 104 in order to create time-stamped records containing tuning and/or other data regarding operation of the personal computer 104 in which the software agent 122 is resident. The software agent 122 is also arranged to cooperate with its host's input/output data port 124.

[0038] Moreover, a person identifier 126 may be provided in order to identify the persons watching television programming on the personal computer 104. As in the case of the person identifier 98, the person identifier 126 may be video camera, an IR camera, or the like, and may be provided with any or all of the viewing equipment shown in Figure 4.

[0039] The software agents 112, 118, and 122 may be telecommunication enabled so that television audience data from all the viewing sites in the statistically selected monitoring site 102 can be communicated, via the Internet, a public telephone system, or the like, to a locally located or remotely located intermediate data collector

128 and then to a remotely located central office 130 through a communication channel 170. The intermediate data collector 128 can be flexibly located either at the same statistically selected monitoring site 102, or at a remotely located site 166, or at the central office 130. For this purpose, the input/output data ports 114, 120, and 124 may be serial ports, parallel ports, universal serial buses (USB), firewires (according to IEEE 1394), or the like. The data transfer may, for example, be structured as a background task and take the form of a sequence of data packets, each of which is e-mailed or otherwise communicated to the remotely located intermediate data collector 128 during pauses in a user's on line sessions or at any other time. The intermediate data collector 128, for example, may be a computerized data collector or an Internet service provider. Alternatively, the intermediate data collector 128 may be a home unit, in which case, the intermediate data collector 128 may be located within the statistically selected monitoring site 102 and may itself be arranged to communicate tuning and demographic data via e-mail or other communication to the central office 130.

**[0040]** The software agent 122 additionally may monitor the personal computer 104 for interactive uses such as Internet usage (e.g., through logging of Universal Resource Locators, URLs), application software usage, and television viewing supported by the personal computer 104. Similarly, to the extent that the digital converter 106 and the digital television set 110 are web-enabled, the software agents 114 and 118 may monitor interactive uses such as Internet usage (e.g., through logging of URLs) and application software usage, as well as television viewing.

**[0041]** Because not all equipment that is encountered by a research firm doing television audience research, at least during the early part of the digital television broadcasting era, will be compatible with the software agent approach discussed above, the second embodiment 100 of the measurement system of the present invention may be arranged to include many or all of the features found in the first embodiment 60.

**[0042]** As described above, the first embodiment 60 measures the great majority of the overall audience by detecting the programs to which receivers are tuned by detecting program identification codes embedded in the programs, and/or by extracting signatures of the programs being viewed and by comparing the extracted signatures to reference signatures. Moreover, the second embodiment 100 measures not only the overall audience, but also interactive features provided with the programming. The embodiments described below are specifically arranged to measure, in an efficient manner, the digital television viewing data where multiple television programs are present in a common digital transmission channel (e.g., of 6 MHz), particularly where a digital television set does not have an accessible operating system with which a software agent can reside. The first embodiment 60 is also useful where there is no

I/O interface on the television set so that there is no easy way to read data from the television set.

**[0043]** Figure 4 depicts a third embodiment 200 of the invention in which a statistically selected monitoring site 202, during the transition period when both analog and digital broadcasting occur, includes, for example, a first viewing site 204, a second viewing site 206, and a third viewing site 208. The first viewing site 204 includes a digital converter 210 connected to an analog television set 212. The audio portion of a program to which the analog television set 212 is tuned is detected by a detector 214. The detector 214 may detect this audio portion by non-intrusively detecting the sound provided by a speaker 216 of the analog television set 212 or by intrusively detecting the audio signal from a direct connection to the analog television set 212.

**[0044]** A probe 218 is provided to detect the intermediate frequency signal of the digital converter 210. A signal processor 220 demodulates the detected intermediate frequency signal to the baseband bit stream contained in the detected intermediate frequency signal, and then demultiplexes the baseband bit stream to recover the audio portion of the baseband bit stream.

**[0045]** A comparator 222 may be arranged to first determine whether there is a program identification code in the audio detected by the detector 214. If there is a program identification code in the audio detected by the detector 214, this program identification code identifies the program to which the analog television set 212 is tuned and is, therefore, logged. If there is no program identification code in the audio detected by the detector 214, the comparator 222 then scans the audio portion of the baseband bit stream provided by the signal processor 220 in order to detect the audio in a first program contained in the intermediate frequency signal detected by the probe 218. The comparator 222 compares this audio to the audio data from the detector 214. If there is a match, the program to which the digital converter 210 is tuned is known from the information provided by the signal processor 220. If there is no match, the comparator 222 then scans the audio portion of the baseband bit stream provided by the signal processor 220 in order to detect the audio in a second program contained in the intermediate frequency signal detected by the probe 218, and so on until the comparator 222 detects a match. Once a match is found, the major and minor channel numbers of the matched channel are known, and the corresponding program identifying ancillary code can be read from the corresponding data packet.

**[0046]** The second viewing site 206 includes a digital television set 224. The audio portion of a program to which the digital television set 224 is tuned is detected by a detector 226. The detector 226 detects this audio portion by non-intrusively detecting the sound provided by a speaker 228 of the digital television set 224 or by intrusively detecting the audio signal from a direct connection to the digital television set 224.

**[0047]** A probe 230 is provided to detect the interme-

diate frequency signal of the digital television set 224. A signal processor 232 operates similarly to the signal processor 220 in order to provide the audio portion of the baseband bit stream in the intermediate frequency signal detected by the probe 230. A comparator 234 operates similarly to the comparator 222 in order to first determine whether there is a program identification code in the audio detected by the detector 226 and, if there is not, to scan the audio portion of the baseband bit stream provided by the signal processor 232 until a match is found.

[0048] The third viewing site 208 includes a personal computer 236. The audio portion of a program to which the personal computer 236 is tuned is detected by a detector 238. The detector 238 detects this audio portion by non-intrusively detecting the sound provided by speakers 240 of the personal computer 236 or by intrusively detecting the audio signal from a direct connection to the personal computer 236.

[0049] A probe 242 is provided to detect the intermediate frequency signal of the personal computer 236. A signal processor 244 operates similarly to the signal processor 220 in order to provide the audio portion of the baseband bit stream in the intermediate frequency signal detected by the probe 242. A comparator 246 operates similarly to the comparator 222 in order to first determine whether there is a program identification code in the audio detected by the detector 238 and, if there is not, to scan the audio portion of the baseband bit stream provided by the signal processor 244 until a match is found.

[0050] The comparators 222, 234, and 246 provide their program identification codes from the audio or from the data packet, and/or match information to a home unit 248, which may be provided with data storage and forwarding unit capability, within the statistically selected monitoring site 202. A remotely located data collection central office 250 is schematically depicted as a computer based data collection central office that interchanges data with the home unit 248 over a communication network 252, such as a public switched telephone network, the Internet, or the like. Moreover, a person identifier 254 may be provided in order to identify the persons watching television programming on the digital television set 224. As in the case of the person identifier 98, the person identifier 254 may be video camera, an IR camera, or the like, and may be provided for any or all of the viewing equipment shown in Figure 4.

[0051] Alternatively, instead of using intermediate frequency probes for the probes 218, 230, and 242, local oscillator probes may be used. A local oscillator probe may be employed to initially identify the channel tuned by its associated television receiver, which offers a significant speed advantage in the measurement. That is, because channel detection apparatus normally operates much faster than does audio signal comparison apparatus, the program determination process can be carried out in a hierarchical fashion in which the broadcast

channel is first determined from the local oscillator signal by the signal processors 220, 232, and 244 (assuming that a program identification code is not first detected). Then, the comparators 222, 234, and 246 sequentially tune to the programs co-transmitted in the detected broadcast channel and compare the audio portion of the tuned program to the audio data from detectors 214, 226, and 238 in order to identify the program in the broadcast channel. In this way, the comparators 222, 234, and 246 are not required to sequentially tune through all of the programs in all of the available channels in order to determine the tuned program.

[0052] A still further alternative is provided by a fourth embodiment 300 of the invention shown in Figure 5. The fourth embodiment 300 is used in a statistically selected monitoring site 302 having a first viewing site 304, a second viewing site 306, and a third viewing site 308. The first viewing site 304 includes a digital converter 310 connected to an analog television set 312. The audio portion of a program to which the analog television set 312 is tuned is detected by a detector 314. The detector 314 may detect this audio portion by non-intrusively detecting the sound provided by a speaker 316 of the analog television set 312 or by intrusively detecting the audio signal from a direct connection to the audio processing circuitry of the analog television set 312.

[0053] A scanning receiver 318 is arranged to sequentially tune to each of the programs carried in each broadcast channel to which the digital converter 310 may be tuned, and to provide an audio portion of each such program to a comparator 320. The comparator 320 may be arranged to first determine whether there is a program identification code in the audio detected by the detector 314. If there is a program identification code in the audio detected by the detector 314, this program identification code is logged because it identifies the program to which the analog television set 312 is tuned. If there is no program identification code in the audio detected by the detector 314, the comparator 320 then compares the audio portion of a first program provided by the scanning receiver 318 to the audio data from the detector 314. If there is a match, the program to which the digital converter 310 is tuned is known from the information provided by the scanning receiver 318. Once a match is found, the major and minor channel numbers of the matched channel are known, and the corresponding program identifying ancillary code can be read from the corresponding data packet.

[0054] If there is no match, the comparator 320 compares the audio portion of a second program provided by the scanning receiver 318 to the audio data from the detector 314, and so on until the comparator 320 detects a match. A demographic input 322 may be used to provide demographic data to the comparator 320 which couples this demographic data, and time, with the program to which the digital converter 310 is tuned as a tuning record. The demographic input 322, for example, may be the well know Peoplemeter with which people cur-

rently identify themselves manually when they are viewing a program displayed on a television set.

[0055] The second viewing site 306 includes a digital television set 324. The audio portion of a program to which the digital television set 324 is tuned is detected by a detector 326. The detector 326 detects this audio portion by non-intrusively detecting the sound provided by a speaker 328 of the digital television set 324 or by intrusively detecting the audio signal from a direct connection to the digital television set 324.

[0056] A scanning receiver 330 is arranged to sequentially tune to each of the programs carried in each broadcast channel to which the digital television set 324 may be tuned, and to provide an audio portion of each such program to a comparator 332. The comparator 332 may be arranged to first determine whether there is a program identification code in the audio detected by the detector 326. If there is a program identification code in the audio detected by the detector 326, this program identification code is logged because it identifies the program to which the digital television set 324 is tuned. If there is no program identification code in the audio detected by the detector 326, the comparator 332 then compares the audio portion of a first program provided by the scanning receiver 330 to the audio data from the detector 326. If there is a match, the program to which the digital television set 324 is tuned is known from the information provided by the scanning receiver 330. If there is no match, the comparator 332 compares the audio portion of a second program provided by the scanning receiver 330 to the audio data from the detector 326, and so on until the comparator 332 detects a match.

[0057] Moreover, a person identifier 334 may be provided in order to identify the persons watching television programming on the digital television set 224. As in the case of the person identifier 98, the person identifier 254 may be video camera, an IR camera, or the like, and may be provided for any or all of the viewing equipment shown in Figure 4. The comparator 332 couples the identities of the persons watching the digital television set 324, and time, with the program to which the digital television set 324 is tuned as a tuning record.

[0058] The third viewing site 308 includes a personal computer 336. The audio portion of a program to which the personal computer 336 is tuned is detected by a detector 338. The detector 338 detects this audio portion by non-intrusively detecting the sound provided by speakers 340 of the personal computer 336 or by intrusively detecting the audio signal from a direct connection to the personal computer 336.

[0059] A scanning receiver 342 is arranged to sequentially tune to each of the programs carried in each broadcast channel to which the personal computer 336 may be tuned, and to provide an audio portion of each such program to a comparator 344. The comparator 344 may be arranged to first determine whether there is a program identification code in the audio detected by the detector 338. If there is a program identification code in

the audio detected by the detector 338, this program identification code is logged because it identifies the program to which the personal computer 336 is tuned. If there is no program identification code in the audio detected by the detector 338, the comparator 344 then compares the audio portion of a first program provided by the scanning receiver 342 to the audio data from the detector 338. If there is a match, the program to which the personal computer 336 is tuned is known from the major and minor channel numbers indicated by the match. If there is no match, the comparator 344 compares the audio portion of a second program provided by the scanning receiver 342 to the audio data from the detector 338, and so on until the comparator 344 detects a match. The comparator 344 couples time with the program to which the personal computer 336 is tuned as a tuning record.

[0060] The comparators 222, 234, and 246 provide their tuning records to a home unit 346, which may be provided with data storage and forwarding unit capability, within the statistically selected monitoring site 302. A remotely located data collection central office 348 is schematically depicted as a computer based data collection central office that interchanges data with the home unit 346 over a communication network 350, such as a public switched telephone network, the Internet, or the like.

[0061] It is likely that many, if not all, digital television sets, digital converters, and like digital equipment will have data ports that will provide output viewer-selected program information for use in consumer devices connected to the data ports. In connection with digital televisions, a data port is likely to provide, for example, the full major channel ATSC bitstream and information on virtual channels that may include analog or digital major channel selection, program (minor channel) selection, physical source (TV, VCR, DVD, etc.) identification, and the like. In connection with digital converters (i.e., set top boxes), a data port is likely to provide, for example, the full ATSC bitstream and information on virtual channels that may include analog or digital major channel selection, program (minor channel) selection, vertical blanking interval data reinserted on the correct line and field of analog signals, and the like.

[0062] Accordingly, a fifth embodiment 400 of the present invention is provided as shown in Figure 6. The fifth embodiment 400 measures tuning to digital television programming in connection with a statistically selected monitoring site 402. The fifth embodiment 400 may include some or all of the features of the previously described embodiments.

[0063] The fifth embodiment 400 permits tuning data, and possibly demographic data, to be collected from digital television reception equipment that includes (i) a personal computer 404, (ii) a digital converter 406, (iii) an analog television set 408 operating in response to the digital converter 406, and (v) a digital television set 410.

[0064] The digital converter 406 has a data port 412. A site unit 414 reads and stores the full ATSC bitstream, the analog or digital major channel selection, the program selection, vertical blanking interval data, and/or the like data available at the data port 412 in order to determine the program selected for viewing on the analog television set 408 as well as any other desired and available information. Moreover, the site unit 414 may be arranged to collect demographic data related to the viewers in the audience of the program selected for viewing on the analog television set 408. For example, the site unit 414 may collect demographic data from a person identifier, a Peoplemeter, or the like, as discussed above. All such data may be uploaded over a communication medium 416, which may be a wire, a power line, and IR link, an RF modem, or the like.

[0065] Similarly, the digital television set 410 has a data port 418. A site unit 420 reads and stores the full major channel ATSC bitstream, the major channel selection, the program selection, physical source identification, and the like data available at the data port 418 in order to determine the program selected for viewing on the digital television set 410 as well as any other desired and available information. Moreover, the site unit 420 may be arranged to collect demographic data related to the viewers in the audience of the program selected for viewing on the digital television set 408. For example, the site unit 420 may collect demographic data from a person identifier, a Peoplemeter, or the like, as discussed above. All such data may be uploaded over a communication medium 421.

[0066] Also, the personal computer 404 has a data port 422. A site unit 424 reads and stores the full major channel ATSC bitstream, the major channel selection, the program selection, and the like data available at the data port 422 in order to determine the program selected for viewing on the personal computer 404 as well as any other desired and available information. Moreover, a person identifier 426 may be provided in order to identify the persons watching television programming on the personal computer 404. As in the case of the person identifier 98, the person identifier 426 may be video camera, an IR camera, or the like, and may be provided with any or all of the viewing equipment shown in Figure 6. All program and demographic data may be uploaded over a communication medium 427.

[0067] The site units 414, 420, and 424 may be telecommunication enabled so that television audience data from all the viewing sites in the statistically selected monitoring site 402 can be communicated, via the Internet, a public telephone system, or the like, to a locally located or remotely located intermediate data collector 428 and then to a remotely located central office 430 through a communication channel 470. The intermediate data collector 428 can be flexibly located either at the same statistically selected monitoring site 402, or at a remotely located site 466, or at the central office 430. For this purpose, the site units 414, 420, and 424 may

be provided with serial ports, parallel ports, universal serial buses (USB), firewires (according to IEEE 1394), or the like. The intermediate data collector 428, for example, may be a computerized data collector or an Internet service provider. Alternatively, the intermediate data collector 428 may be a home unit, in which case, the intermediate data collector 428 may be located within the statistically selected monitoring site 402 and may itself be arranged to communicate tuning and demographic data via e-mail or other communication to the central office 430.

[0068] A software agent 500 is shown in Figure 7. The software agent 500 can be used for any of the software agents 112, 118, and 122. As shown at a block 502 of the software agent 500, the software agent 500 copies the current operating task. If the current operating task uses a packet of television programming as determined at a block 504, the software agent 500 at a block 506 determines whether the data packet has a decodable packet label including a decodable program identification code, name, or other indicia. This program identification data packet is expected to be a feature of digital television programming, particularly if multiple programs are packed simultaneously as minor channels in a broadcast channel in a digital broadcasting environment, and is expected to identify the program tuned by the monitored television.

[0069] If the data packet does not have a decodable packet label, the software agent 500 at a block 508 causes the ON state of the monitored viewing equipment to be logged, provided that this ON state is a new status for the monitored viewing equipment and the monitored viewing equipment is ON. The balance of the measurement system (e.g., the audio signal methods employed by any of the other embodiments 60, 200, and 300 described above) is relied on in order to identify the tuning. Program flow then returns to the block 502 to await the next operating task.

[0070] On the other hand, if the data packet does have a decodable packet label, the software agent 500 determines at a block 510 whether the packet label from the data packet of the current operating task is the same as the packet label previously determined by the software agent 500. If so, there is no need to store the packet label unless it is merely indicative of continued viewing to an already identified television program. Accordingly, program flow returns to the block 502 to await the next operating task. However, if the packet label from the data packet of the current operating system task is not the same as the packet label previously determined at the block 506, the software agent 500 at a block 512 logs the identification of the television program as contained in the program label and also logs the time. Program flow then returns to the block 502 to await the next operating task.

[0071] If the current operating task does not use a packet of television programming as determined at a block 504, the software agent 500 at a block 514 deter-

mines whether the current operating task is a command to other monitored equipment (e.g., a command to the digital television receiver 110 to tune a different channel and to select a particular one of the N programs being broadcast in that channel). If the current operating task is a command to other monitored equipment, the software agent 500 at a block 516 logs as much detail as is available (e.g., the command itself, the identity of the issuer of the command, and the identity of the recipient of the command) in memory, and program flow returns to the block 502.

**[0072]** If the current operating task is not a command to other monitored equipment, the software agent 500 at a block 518 determines if co-transmitted data (i.e., data that is related to one of the television programs being broadcast in a channel and that is transmitted during the same time interval as the program) has been selected by a viewer. Co-transmitted data may comprise a guide to other available television programming, catalog-like details on products being advertised on the co-transmitted program, and the like. Some of these proposed uses of co-transmitted data will be configured so that one can infer what program is being viewed from a URL or other label that logically links the co-transmitted data to the television program. Accordingly, the software agent 500 at a block 520 searches the header portion of a task for such URL or other label, and logs such URL or other label that is found. Thereafter, program flow returns to the block 502.

**[0073]** If co-transmitted data has not been selected by a viewer, the software agent 500 at a block 522 determines if the user of the equipment has directed his or her browser, or other communication software, to access an internet page (assuming that the monitored viewing equipment being monitored is configured so that it has access to the Internet or other on-line service). If the user of the equipment has directed his or her browser, or other communication software, to access an internet page, the software agent 500 at a block 524 searches for a URL or other label, and logs such URL or other label that is found. Thereafter, program flow returns to the block 502. If the user of the equipment has not directed his or her browser, or other communication software, to access an internet page, program flow returns to the block 502.

**[0074]** As an example of the use of a software agent as describe above, consider the case of a person in a statistically selected monitoring site who is viewing a digital television program and who sees an interesting product being advertised. It is expected that the person will have the capability to request more data on that product by means of a simple mouse-click operation. This data, for example, will either be a subset of the data providing the displayed advertisement, or will be co-transmitted subsequently in the signal of the television program that the person has selected for viewing. This data would then be displayed in a separate window on the multi-windowed display being used for television

viewing. An additional set of data could then be obtained by clicking on a hypertext link element of the initially displayed data. This action would result in downloading the desired additional data over the Internet. A software agent installed in this viewing equipment could thus log not only what program was being viewed, but could also supply additional marketing research data on the consumer's use of in-program advertising.

**[0075]** In addition to providing a device for monitoring tuning activity, the software agent of the present invention can be used to collect demographic data relative to the monitored viewing. In a manual approach to the collection of demographic data, the software agent could generate a status and prompting display in one window of the viewing equipment requiring a viewer or user to input the appropriate demographic data. This status and prompting display window could have an appearance similar to that provided by the peoplemeter hardware widely used in contemporary audience measurements and that displays a status reminder light for each occupant of a statistically selected monitoring site. However, in the comparable windowed display arrangement, the name of each occupant could be shown along with a status indicator.

**[0076]** If the software agent is used with a personal computer that can receive digital television programming, a variety of more nearly automatic and less intrusive approaches (from the television viewer's perspective) could be used to collect persons data and update a tiled status display. For example, it is well known to identify an individual user of a manual input device (such as a keyboard or a mouse) of a computer by the characteristic rates of data entry and pauses between data entries. In a television audience measurement, in which the occupant population to be monitored is very small, measurements of this sort should be expected to be highly accurate. Moreover, an increasing number of personal computers have video cameras associated with them, so that the user of the computer can engage in video conferences by telephone. When such equipment is available in a statistically selected monitoring site, a software agent comprising known head location and face recognition software (e.g., as taught by Lu in U.S. Patent No. 4,858,000) can be employed for the identification persons and the collection of demographic data.

**[0077]** Certain modifications of the present invention have been discussed above. Other modifications will occur to those practicing in the art of the present invention. For example, the software agents 112, 118, and 122, as described above, monitor operating tasks. The operating tasks may be operating system events of the operating systems used by the equipment in which the software agent is resident. Indeed, the software agents 112, 118, and 122 may monitor any function of the monitored equipment as long as the desired data is collected.

**[0078]** Also, a statistically selected monitoring site according to each of the embodiments of the invention, as described above, includes certain viewing equipment as

well as certain monitoring equipment. However, it should be understood that a statistically selected monitoring site according to the present invention may include any combination of the equipment incorporated in the embodiments described above, as well as other and/or different equipment.

[0079] Moreover, the software agent 500 described above can be generic so that it can be used with any piece of equipment with which it is compatible, or it may be specialized for each particular apparatus in which it is used. Also, the software agent 500 may be arranged to detect the all window activities conducted by an audience.

[0080] Furthermore, although not shown in Figures 2-5, the digital television reception equipment of the embodiments shown therein may further include auxiliary digital television equipment such as a VCR, a digital video disk player, a video game, or other entertainment systems.

[0081] Additionally, as described above, program identification codes are detected in order to identify television programs. However, television programs may be identified by any indicia such as program names. Moreover, an internet page may be identified by its address or by an identification code or name or label or, in the case of an advertisement on the Internet, by its banner. Therefore, any indicia from which a television program or content associated with a television program may be identified is referred to herein generically as an identification datum.

[0082] Moreover, the home units 248 and/or 346 may be referred to herein as intermediate data collectors.

[0083] Accordingly, the description of the present invention is to be construed as illustrative only and is for the purpose of teaching those skilled in the art the best mode of carrying out the invention.

## Claims

1. A television audience measurement system for identifying a viewer selected television program from among a plurality of television programs broadcast as a time division multiplexed sequence of data packets carried in a broadcast channel, the viewer selected television program being displayed on a television display in a statistically selected location, the television audience measurement system comprising:

receiving means for receiving a time division multiplexed sequence of data packets carried in a broadcast channel;

channel detection means for identifying the broadcast channel received by the receiving means;

acquiring means for acquiring an audio portion of a viewer selected television program being

displayed on a television;

recovering means for recovering audio components respectively corresponding to the television programs contained in the sequence of data packets carried in the broadcast channel identified by the channel detection means; and, comparing means for determining if a program identification code is present in the audio portion acquired by the acquiring means, and, if no program identification code is present in the audio portion, for comparing the audio components recovered by the recovering means to the audio portion acquired by the acquiring means in order to determine the viewer selected television program.

2. The television audience measurement system of claim 1 wherein the acquiring means comprises a sensor arranged to acquire a representation of a speaker signal from a speaker associated with the television display.
3. The television audience measurement system of claim 1 wherein the acquiring means comprises a connection to audio processing circuitry associated with the television display.
4. The television audience measurement system of claim 1 wherein the receiving means comprises:
  - an intermediate frequency probe arranged to acquire an intermediate frequency signal from a viewer controlled tuner associated with the television display; and,
  - demodulating means for demodulating the intermediate frequency signal in order to receive the data packets.
5. The television audience measurement system of claim 1 wherein the receiving means comprises:

a local oscillator frequency probe arranged to pick up a local oscillator frequency signal from the television display;

wherein the channel detection means identifies the broadcast channel from the local oscillator signal;

wherein the recovering means recovers the audio components from television programs contained in the identified broadcast channel; and,

wherein the comparing means compares the audio components to the representation of the speaker signal in order to determine the viewer selected television program.

6. The television audience measurement system of claim 1 wherein the receiving means comprises a scanning receiver arranged to scan each of a plu-

- ality of broadcast channels and to receive a corresponding plurality of time division multiplexed television programs from each of the plurality of 20 broadcast channels.
7. The television audience measurement system of claim 1 further comprising identifying means for identifying persons in an audience of the viewer selected television program.
8. A method of identifying a television program selected by a viewer from a set of television programs broadcast as multiplexed data packets in a broadcast channel, the viewer selected television program being at least audibly output  
on an apparatus tuned to the viewer selected viewer selected television program, the method comprising the steps of:
- a) identifying broadcast channel tuned by the apparatus;
  - b) acquiring an audio portion of the viewer selected television program from the audible output of the apparatus;
  - c) selecting an audio component associated with one of the set of television programs broadcast in the identified broadcast channel;
  - d) determining if a program identification code is present in the audio portion acquired by the acquiring means, and, if no program identification code is present in the audio portion, comparing the selected audio portion with the acquired audio component in order to determine whether the audio portion and the audio component match;
  - e) if the audio portion and the audio component match, storing a tuning record from at least one of the audio portion and the audio component; and,
  - f) if the audio portion and the audio component do not match, repeating steps (c) through (f) until either a match is found or the set of television programs is exhausted.
9. The method of claim 8 wherein step a) comprises the step of identifying the viewer selected broadcast channel by use of a channel detector associated with the apparatus.
10. The method of claim 9 wherein step b) comprises the step of acquiring the audio portion of the viewer selected television program by use of an audio probe adjacent the apparatus.
11. The method of claim 10 wherein step c) comprises the step of selecting the audio component by use of a digital tuner that is not a portion of the apparatus.
12. The method of claim 8 wherein step b) comprises the step of acquiring the audio portion of the viewer selected television program by use of an audio probe adjacent the apparatus.
13. The method of claim 12 wherein step c) comprises the step of selecting the audio component by use of a digital tuner that is not a portion of the apparatus.
14. The method of claim 8 wherein step c) comprises the step of selecting the audio component by use of a digital tuner that is not a portion of the apparatus.
15. The television audience measurement system of claim 1 wherein the television audience measurement system is at least partially resident in a set top box.
16. The television audience measurement system of claim 1 wherein the television audience measurement system is at least partially resident in a television receiver.
17. The television audience measurement system of claim 1 wherein the television audience measurement system is at least partially resident in a computer.
18. The method of claim 8 wherein the steps are at least partially implemented in a set top box.
19. The method of claim 8 wherein the steps are at least partially implemented in a television receiver.
20. The method of claim 8 wherein the steps are at least partially implemented in a computer.
- Patentansprüche**
1. Fernsehzuschauerermittlungssystem zum Identifizieren eines von einem Zuschauer ausgewählten Fernsehprogramms aus mehreren Fernsehprogrammen, die als zeitgemultiplexte Abfolge von Datenpaketen in einem Sendekanal gesendet werden, wobei das vom Zuschauer ausgewählte Fernsehprogramm auf einer Fernsehanzeige an einem statistisch ausgewählten Ort angezeigt wird, wobei das Fernsehzuschauerermittlungssystem umfasst:
- eine Empfangseinrichtung zum Empfangen einer zeitgemultiplexten Abfolge von Datenpaketen in einem Sendekanal;
  - eine Kanaldetektionseinrichtung zum Identifizieren des Sendekanals, der durch die Empfangseinrichtung empfangen wird;

- eine Erfassungseinrichtung zum Erfassen eines Audioanteils eines vom Zuschauer ausgewählten Fernsehprogramms, das auf einem Fernseher angezeigt wird;  
eine Wiederherstelleinrichtung zum Wiederherstellen von Audiokomponenten, die jeweils den Fernsehprogrammen entsprechen, die in der Abfolge der Datenpakete in dem durch die Kanaldetektionseinrichtung identifizierten Sendekanal enthalten sind; und  
eine Vergleichseinrichtung, um festzustellen, ob ein Programmidentifikationscode in dem durch die Erfassungseinrichtung erfassten Audioanteil vorliegt, und um, wenn kein Programmidentifikationscode in dem Audioanteil vorliegt, die durch die Wiederherstelleinrichtung wieder hergestellten Audiokomponenten mit dem durch die Erfassungseinrichtung erfassten Audioanteil zu vergleichen, um das vom Zuschauer gewählte Fernsehprogramm zu ermitteln.
2. Fernsehzuschauerermittlungssystem nach Anspruch 1,  
wobei die Erfassungseinrichtung einen Sensor umfasst, der so gestaltet ist, um eine Ausgabe eines Lautsprecher Signals aus einem Lautsprecher, der der Fernsehanzeige zugeordnet ist, zu erfassen.
3. Fernsehzuschauerermittlungssystem nach Anspruch 1,  
wobei die Erfassungseinrichtung eine Verbindung zu einem Klangverarbeitungsschaltkreis aufweist, der der Fernsehanzeige zugeordnet ist.
4. Fernsehzuschauerermittlungssystem nach Anspruch 1,  
wobei die Empfangseinrichtung umfasst:
- ein Zwischenfrequenzmesselement, das so gestaltet ist, um ein Zwischenfrequenzsignal von einem von einem Zuschauer gesteuerten Tuner, der der Fernsehanzeige zugeordnet ist, zu erfassen; und  
eine Demodulationseinrichtung zum Demodulieren des Zwischenfrequenzsignals, um die Datenpakete zu empfangen.
5. Fernsehzuschauerermittlungssystem nach Anspruch 1,  
wobei die Empfangseinrichtung umfasst:
- ein Messelement für eine lokale Oszillatorfrequenz, das ausgestaltet ist, um ein lokales Oszillatorfrequenzsignal von einer Fernsehanzeige aufzunehmen;
- wobei die Kanaldetektionseinrichtung den Sendekanal aus dem lokalen Oszillatorsignal identifiziert,  
wobei die Wiederherstelleinrichtung die Audioanteile aus den Fernsehprogrammen, die in dem identifizierten Sendekanal enthalten sind, wiederherstellt; und  
wobei die Vergleichseinrichtung die Audioanteile mit der Ausgabe des Lautsprecher Signals vergleicht, um das vom Zuschauer ausgewählte Fernsehprogramm zu bestimmen.
6. Fernsehzuschauerermittlungssystem nach Anspruch 1,  
wobei die Empfangseinrichtung einen Abtastempfänger aufweist, der ausgestaltet ist, um jeden der mehreren Sendekanäle abzutasten und entsprechend mehrere zeitgemultiplexte Fernsehprogramme von jedem der mehreren 20 Sendekanäle zu empfangen.
7. Fernsehzuschauerermittlungssystem nach Anspruch 1, das weiterhin eine Identifikationseinrichtung umfasst, um Personen in einer Zuschauerschaft des vom Zuschauer ausgewählten Fernsehprogramms zu identifizieren.
8. Verfahren zum Identifizieren eines Fernsehprogramms, das durch einen Zuschauer aus einer Menge von Fernsehprogrammen ausgewählt ist, die als gemultiplexte Datenpakete in einem Sendekanal gesendet werden, wobei das vom Zuschauer ausgewählte Fernsehprogramm zumindest eine Klängausgabe an einem Gerät aufweist, das auf das vom Zuschauer ausgewählte Fernsehprogramm eingestellt ist, wobei das Verfahren die Schritte umfasst:
- a) Identifizieren eines Sendekanals, auf den das Gerät eingestellt ist;  
b) Erfassen eines Audioanteils des vom Zuschauer ausgewählten Fernsehprogramms von der Klängausgabe des Geräts;  
c) Auswählen einer Audiokomponente, die einem der mehreren Fernsehprogramme zugeordnet ist, die in dem identifizierten Sendekanal gesendet werden;  
d) Feststellen, ob ein Programmidentifikationscode in dem durch die Erfassungseinrichtung erfassten Audioanteil vorhanden ist, und, wenn kein Programmidentifikationscode in dem Audioanteil vorhanden ist, Vergleichen der ausgewählten Audiokomponente mit dem erfassten Audioanteil, um festzustellen, ob der Audioanteil und die Audiokomponente übereinstimmen;  
e) wenn der Audioanteil und die Audiokomponente übereinstimmen, Speichern eines Kanalwahleintrags von dem Audioanteil und/oder der Audiokomponente; und

- f) wenn der Audioanteil und die Audiokomponente nicht übereinstimmen, Wiederholen der Schritte c) bis f) bis entweder eine Übereinstimmung gefunden wird oder die Menge der Fernsehprogramme erschöpft ist.
9. Verfahren nach Anspruch 8, wobei der Schritt a) den Schritt des Identifizierens des vom Zuschauer ausgewählten Sendekanals durch die Verwendung eines Kanaldetektors, der dem Gerät zugeordnet ist, umfasst.
10. Verfahren nach Anspruch 9, wobei der Schritt b) den Schritt des Erfassens des Audioanteils des vom Zuschauer ausgewählten Fernsehprogramms mit Hilfe eines Tonaufnehmers, der neben dem Gerät angeordnet ist, umfasst.
11. Verfahren nach Anspruch 10, wobei der Schritt c) den Schritt des Auswählens des Audioanteils mit Hilfe eines digitalen Tuners, der nicht Teil des Gerätes ist, umfasst.
12. Verfahren nach Anspruch 9, wobei der Schritt b) den Schritt des Erfassens des Audioanteils des vom Zuschauer ausgewählten Fernsehprogramms mit Hilfe eines Tonaufnehmers, der neben dem Gerät angeordnet ist, umfasst.
13. Verfahren nach Anspruch 12, wobei der Schritt c) den Schritt des Auswählens der Audiokomponente mit Hilfe eines digitalen Tuners, der nicht Teil des Gerätes ist, umfasst.
14. Verfahren nach Anspruch 8, wobei der Schritt c) den Schritt des Auswählens der Audiokomponente mit Hilfe eines digitalen Tuners, der nicht Teil des Gerätes ist, umfasst.
15. Fernsehzuschauerermittlungssystem nach Anspruch 1, wobei das Fernsehzuschauerermittlungssystem zumindest teilweise in einer Set-Top-Box enthalten ist.
16. Fernsehzuschauerermittlungssystem nach Anspruch 1, wobei das Fernsehzuschauerermittlungssystem zumindest teilweise in einem Fernsehempfänger enthalten ist.
17. Fernsehzuschauerermittlungssystem nach Anspruch 1, wobei das Fernsehzuschauerermittlungssystem zumindest teilweise in einem Computer enthalten ist.
18. Verfahren nach Anspruch 8, wobei die Schritte zu-

mindest teilweise in einer Set-Top-Box implementiert sind.

19. Verfahren nach Anspruch 8, wobei die Schritte zumindest teilweise in einem Fernsehempfänger implementiert sind.

20. Verfahren nach Anspruch 8, wobei die Schritte zumindest teilweise in einem Computer implementiert sind.

## Revendications

1. Système de mesure d'audience de télévision pour identifier un programme de télévision sélectionné par un spectateur parmi une pluralité de programmes télévisés diffusés comme une séquence multiplexée par répartition dans le temps de paquets de données transportés dans un canal de diffusion, le programme de télévision sélectionné par un spectateur étant affiché sur un écran de télévision dans un lieu sélectionné de manière statistique, le système de mesure d'audience de télévision comprenant :

des moyens de réception pour recevoir une séquence multiplexée par répartition dans le temps de paquets de données transportées dans un canal de diffusion ;  
des moyens de détection de canal pour identifier le canal de diffusion reçu par les moyens de réception ;  
des moyens d'acquisition pour acquérir une partie audio d'un programme de télévision sélectionné par un spectateur et diffusé sur un poste de télévision ;  
des moyens de récupération pour récupérer des composants audio correspondant respectivement aux programmes télévisés contenus dans la séquence de paquets de données transportés dans le canal de diffusion identifié par les moyens de détection de canal ; et  
des moyens de comparaison pour déterminer si un code d'identification de programme est présent dans la partie audio obtenue par les moyens d'acquisition et, si aucun code d'identification de programme n'est présent dans la partie audio, pour comparer les composants audio récupérés par les moyens de récupération à la partie audio obtenue par les moyens d'acquisition afin de déterminer le programme de télévision sélectionné par le spectateur.

en provenance d'un haut-parleur associé à l'écran de télévision.

3. Système de mesure d'audience de télévision selon la revendication 1, dans lequel les moyens d'acquisition comprennent une connexion à un ensemble de circuits de traitement audio associé à l'écran de télévision.

4. Système de mesure d'audience de télévision selon la revendication 1, dans lequel les moyens de réception comprennent :

une sonde de fréquence intermédiaire agencée de façon à acquérir un signal de fréquence intermédiaire à partir d'un syntoniseur commandé par un spectateur et qui est associé à l'écran de télévision ; et  
des moyens de démodulation pour démoduler le signal de fréquence intermédiaire afin de recevoir les paquets de données.

5. Système de mesure d'audience de télévision selon la revendication 1, dans lequel les moyens de réception comprennent :

une sonde de fréquence de l'oscillateur local agencée de façon à saisir un signal de fréquence de l'oscillateur local à partir de l'écran de télévision ;

dans lequel les moyens de détection de canal identifient le canal de diffusion à partir du signal de l'oscillateur local ;

dans lequel les moyens de récupération récupèrent les composants audio à partir de programmes télévisés contenus dans le canal de diffusion identifié ; et

dans lequel les moyens de comparaison comparent les composants audio à la représentation du signal de haut-parleur afin de déterminer le programme de télévision sélectionné par un spectateur.

6. Système de mesure d'audience de télévision selon la revendication 1, dans lequel les moyens de réception comprennent un récepteur de balayage agencé de façon à balayer chaque canal d'une pluralité de canaux de diffusion et à recevoir une pluralité correspondante de programmes de télévision multiplexés par répartition dans le temps à partir de chaque canal de la pluralité des 20 canaux de diffusion.

7. Système de mesure d'audience de télévision selon la revendication 1, comprenant en outre des moyens d'identification pour identifier des personnes dans une audience du programme de télévision

sélectionné par le spectateur.

8. Méthode d'identification d'un programme de télévision sélectionné par un spectateur à partir d'un ensemble de programmes de télévision diffusés comme des paquets de données multiplexés dans un canal, le programme de télévision sélectionné par un spectateur étant fourni en sortie au moins de manière audible

sur un appareil syntonisé au programme de télévision sélectionné par un spectateur, la méthode comprenant les étapes consistant à :

- a) identifier un canal de diffusion syntonisé par l'appareil ;
- b) acquérir une partie audio du programme de télévision sélectionné par un spectateur à partir de la sortie audible de l'appareil ;
- c) sélectionner un composant audio associé à un programme de l'ensemble des programmes de télévision diffusés dans le canal de diffusion identifié ;
- d) déterminer si un code d'identification de programme est présent dans la partie audio acquise par les moyens d'acquisition et, si aucun code d'identification de programme n'est présent dans la partie audio, comparer la partie audio sélectionnée au composant audio acquis afin de déterminer si la partie audio et le composant audio correspondent ;
- e) si la partie audio et le composant audio correspondent, stocker un enregistrement de syntonisation à partir d'au moins un élément de la partie audio et du composant audio ; et
- f) si la partie audio et le composant audio ne correspondent pas, répéter les étapes (c) à (f) jusqu'à ce qu'une correspondance soit trouvée ou jusqu'à ce que l'ensemble des programmes de télévision soit épuisé.

9. Méthode selon la revendication 8, dans laquelle l'étape a) comprend l'étape consistant à identifier le canal de diffusion sélectionné par un spectateur en utilisant un détecteur de canal associé à l'appareil.

10. Méthode selon la revendication 9, dans laquelle l'étape b) comprend l'étape consistant à acquérir la partie audio du programme de télévision sélectionné par un spectateur en utilisant une sonde audio adjacente à l'appareil.

11. Méthode selon la revendication 10, dans laquelle l'étape c) comprend l'étape consistant à sélectionner le composant audio en utilisant un syntoniseur numérique qui n'est pas une partie de l'appareil.

12. Méthode selon la revendication 8, dans laquelle l'étape b) comprend l'étape consistant à acquérir la

partie audio du programme de télévision sélectionné par un spectateur en utilisant une sonde audio adjacente à l'appareil.

13. Méthode selon la revendication 12, dans laquelle l'étape c) comprend l'étape consistant à sélectionner le composant audio en utilisant un syntoniseur numérique qui n'est pas une partie de l'appareil. 5
14. Méthode selon la revendication 8, dans laquelle l'étape c) comprend l'étape consistant à sélectionner le composant audio en utilisant un syntoniseur numérique qui n'est pas une partie de l'appareil. 10
15. Système de mesure d'audience de télévision selon la revendication 1, dans lequel le système de mesure d'audience de télévision réside au moins partiellement dans un boîtier décodeur. 15
16. Système de mesure d'audience de télévision selon la revendication 1, dans lequel le système de mesure d'audience de télévision réside au moins partiellement dans un poste de télévision. 20
17. Système de mesure d'audience de télévision selon la revendication 1, dans lequel le Système de mesure d'audience de télévision réside au moins partiellement dans un ordinateur. 25
18. Méthode selon la revendication 8, dans laquelle les étapes sont au moins partiellement implémentées dans un boîtier décodeur. 30
19. Méthode selon la revendication 8, dans laquelle les étapes sont au moins partiellement implémentées dans un poste de télévision. 35
20. Méthode selon la revendication 8, dans laquelle les étapes sont au moins partiellement implémentées dans un ordinateur. 40

45

50

55

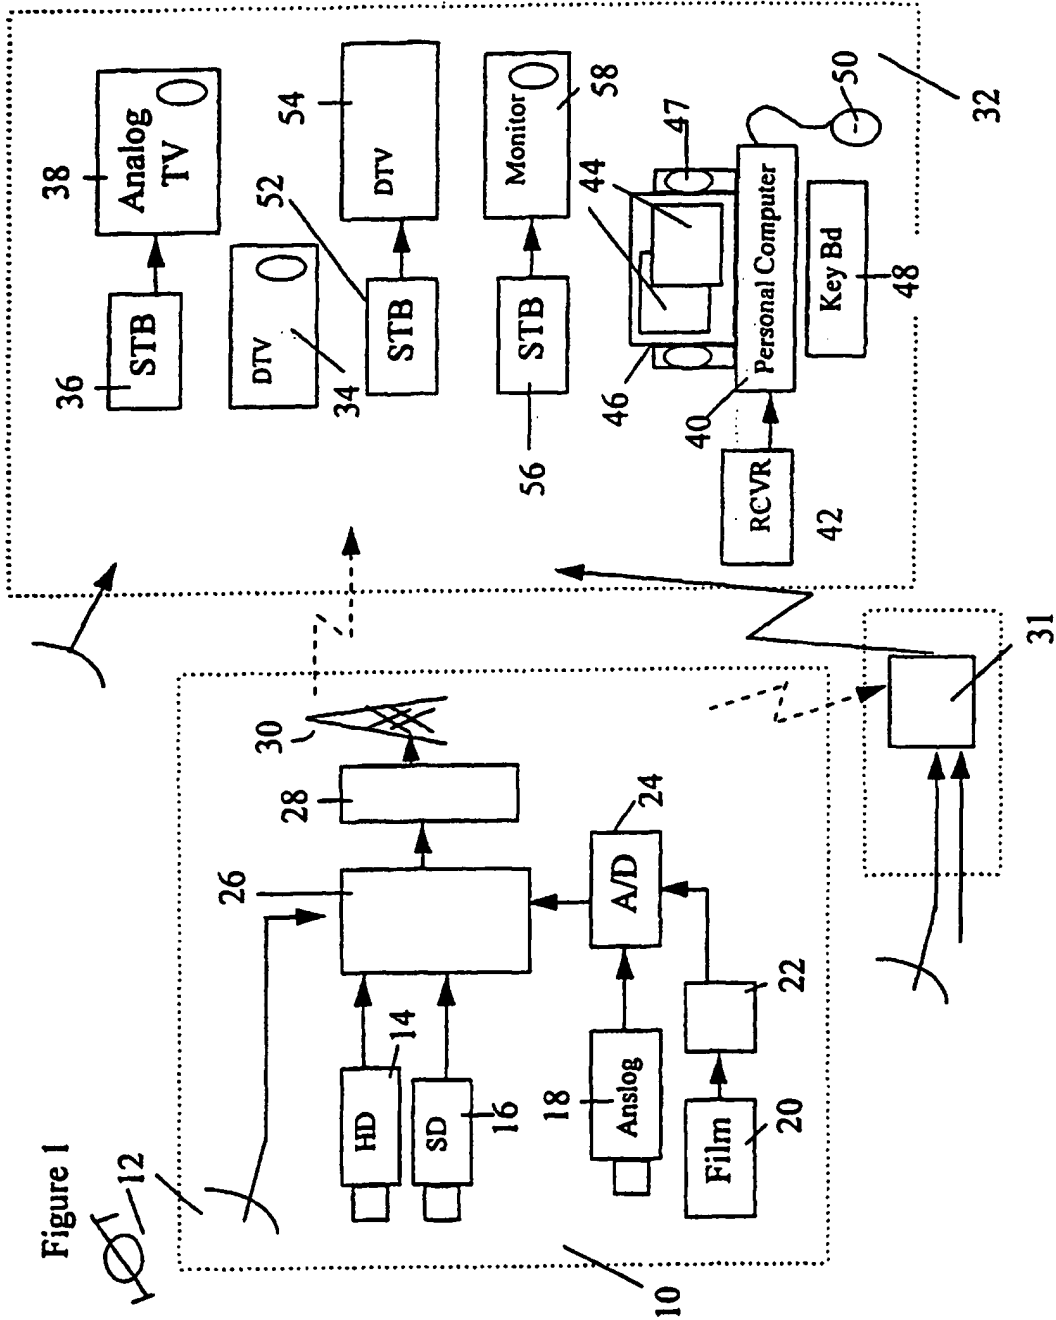
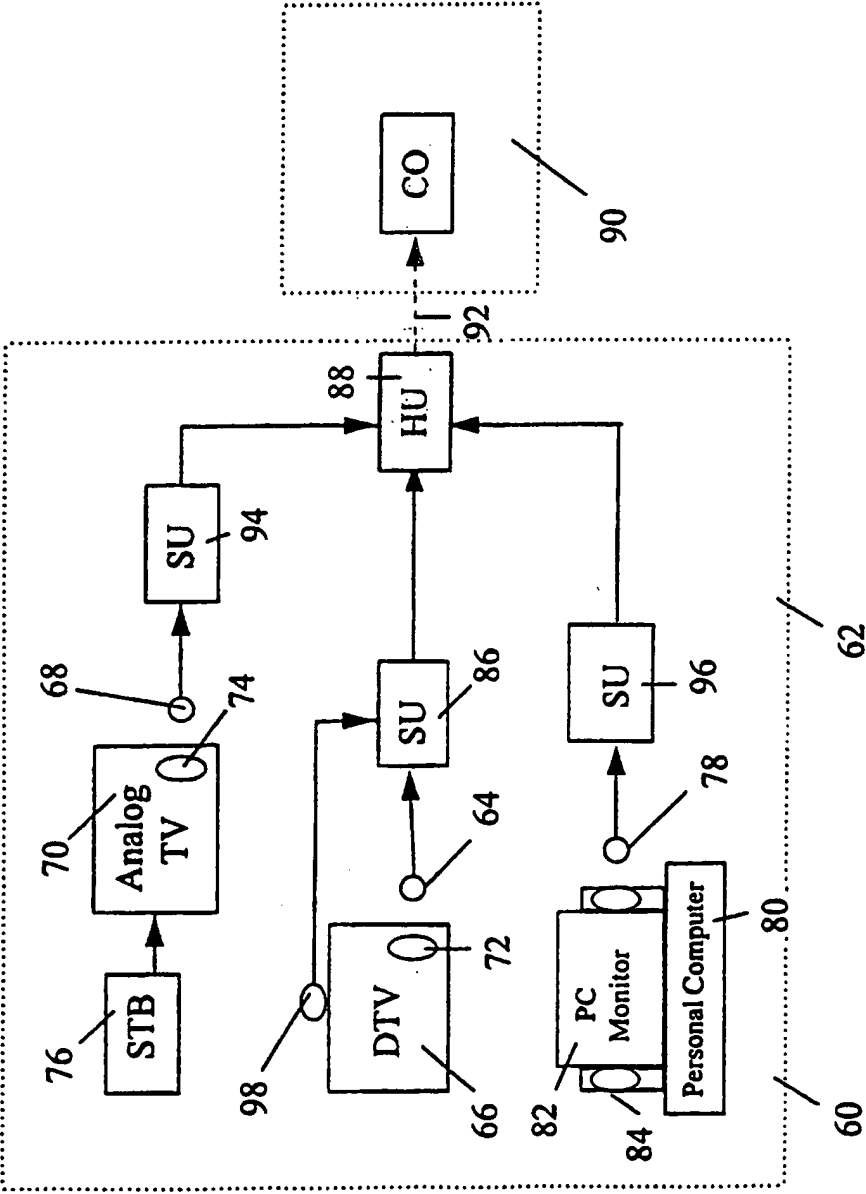


Figure 2



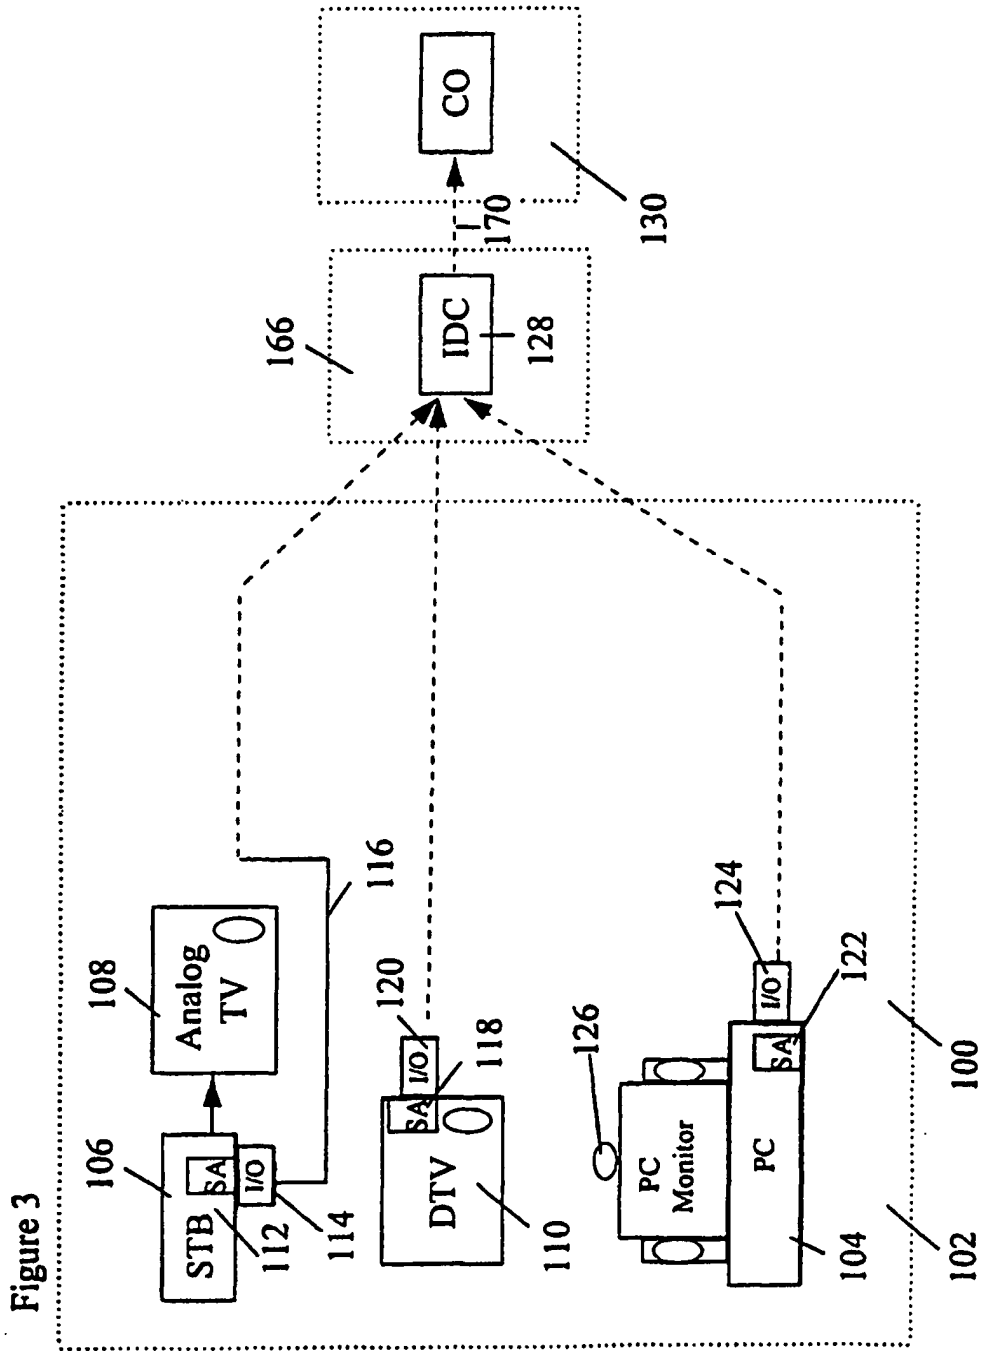
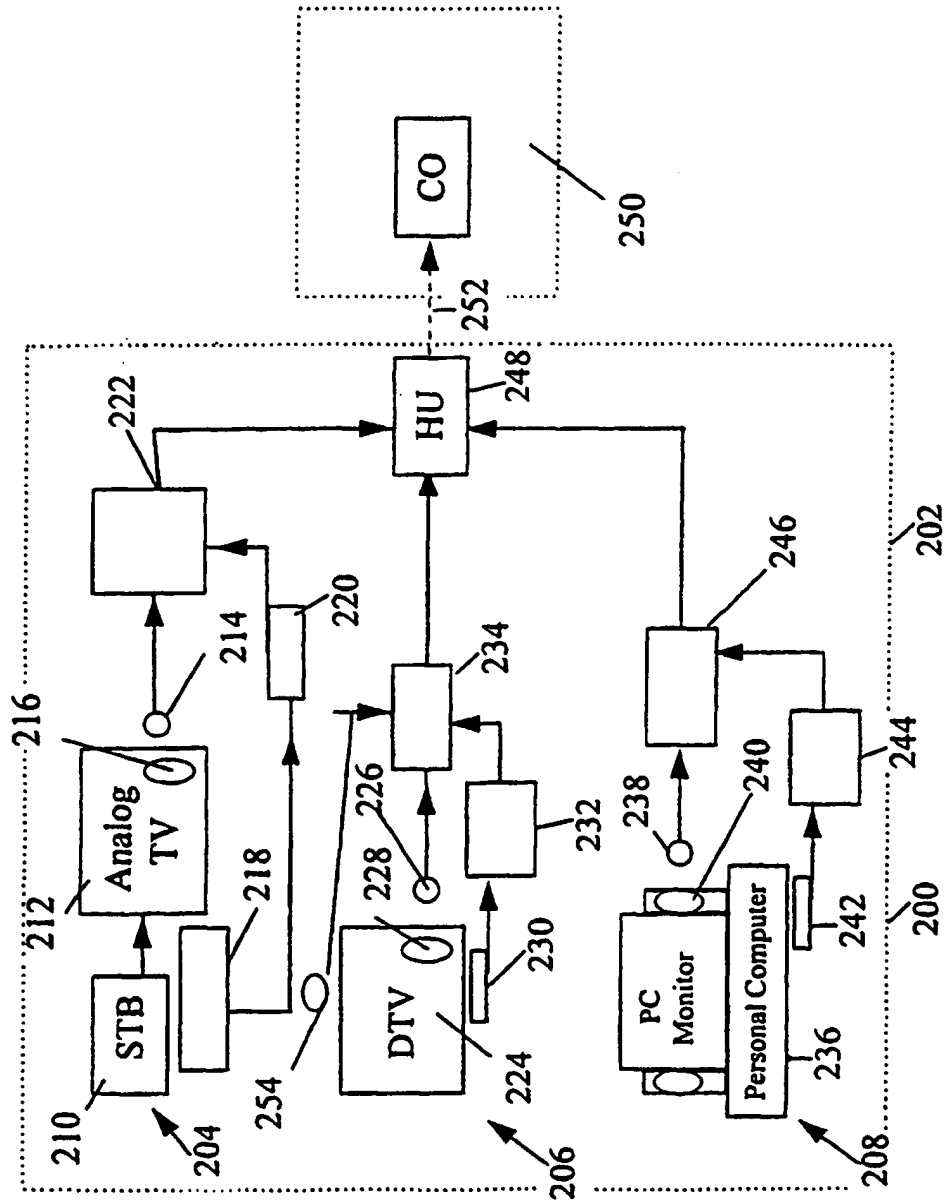
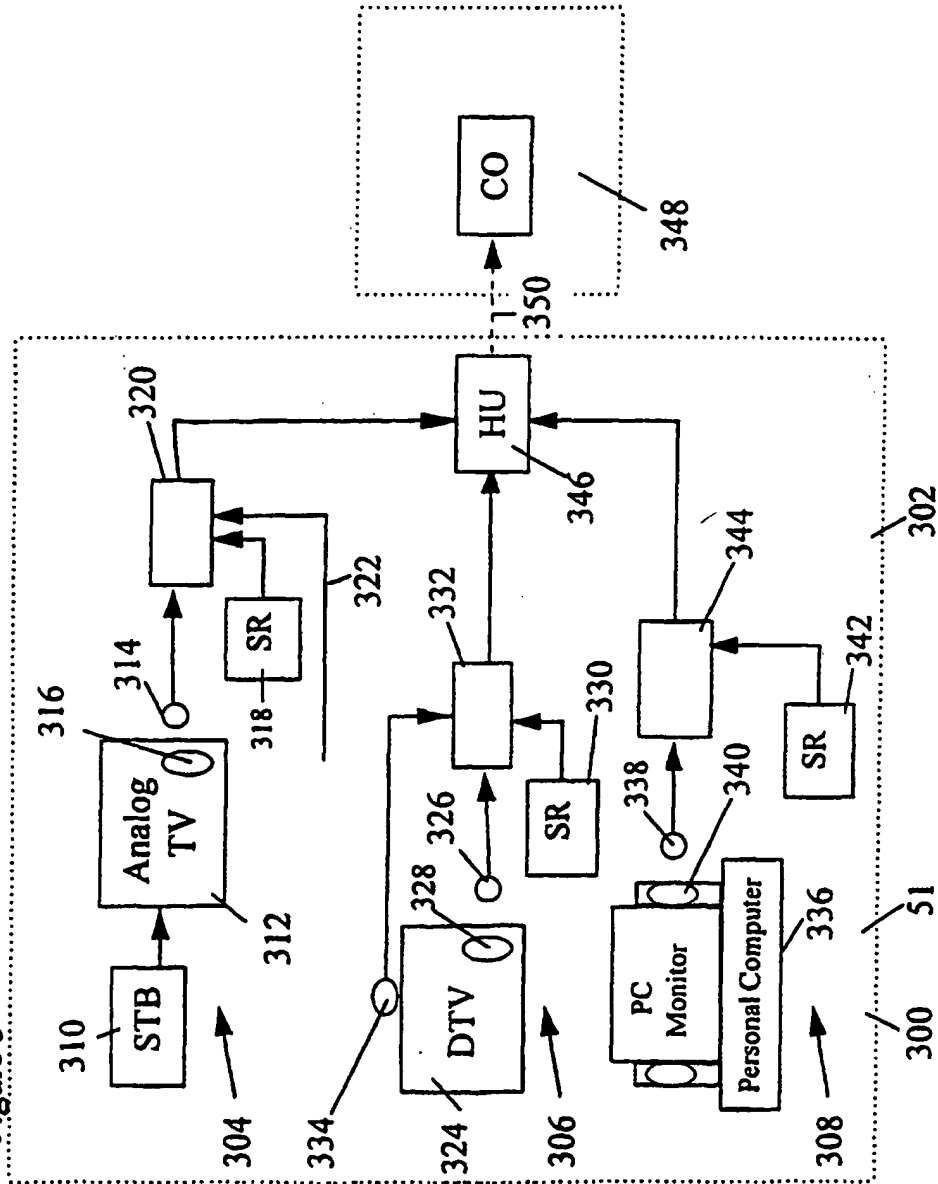


Figure 4



**Figure 5.....**



**Figure 6**

